


RES-401 ^{GB}

Operating Instructions

Ropex RES-401 ... In-stock USA
Force Global, Inc.
ph: 414 507-9378 | fx: 262-628-4451
e-mail: info@forceglobal.com

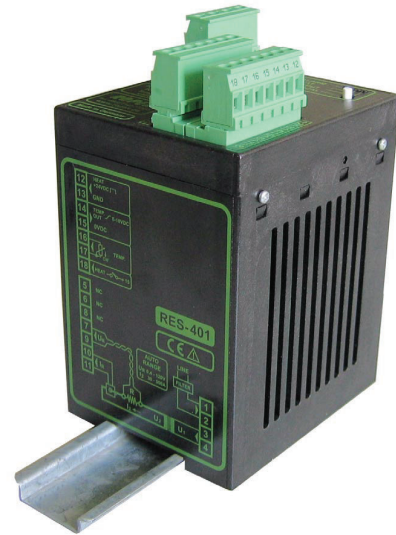

Important features

- Microprocessor technology
- Automatic zero calibration (AUTOCAL)
- Automatic optimization (AUTOTUNE)
- Automatic configuration of the secondary voltage and current ranges (AUTORANGE, as of October 2005)
- Automatic frequency adjustment
- Large current and voltage range
- Set point selection with potentiometer
- Temperature range: 300°C
- 0...10VDC analog output for ACTUAL temperature
- Activated with contact or 24VDC signal
- Alarm function